

HARDWOOD + MATT BRUSHED

PRODUCT SPECIFICATIONS


Type	Australian Timber	Style	Single Plank
Description	Engineered multi-layer natural timber veneer interlocking floor boards featuring G5 Locking System		
Board Construction	3mm hardwood face layer 10mm Poplar base	Profile	Square Edge
Installation Method	Direct Stick or Floating	Finish	Matt Brushed <8%
Coating	Factory coated with seven layers of UV cured acrylic	Underlay	Standard - 2mm Closed Cell Foam Acoustic - 3mm or 5mm ImpactaMat
Dimensions	1820/2100 x 136 x 14mm		1820/2100 x 180 x 14mm
Boards per Pack	8		6
m² per Pack	1.980m ² /2.284m ²		1.966m ² /2.268m ²
m² per Pallet	126.720m ² /146.176m ²		129.756m ² /149.688m ²
Pack Weight	23kg		23kg

TEST DATA

Fire Rating	Critical Heat Flux: 4.2kW/m ² Smoke Value: 8% minute	Slip Resistance	P3
Janka Rating	6 - 11	Certification	Forestry Stewardship Certification (FSC)

Warranty	25 Year Residential Warranty 10 Year Commercial Warranty		
Variations in Timber	<p>Timber is a natural material and variations in colour, texture and other naturally occurring features occur between pieces and batches of the same species.</p> <p>Timber flooring, whilst dried during production, continues to take up and give up moisture during its life, depending on weather, aspect and local conditions. In so doing, some movement and changes to the surface of your floor are to be expected and will be apparent. This is normal and may include fine cracks on and between boards and changes in colour.</p>		

AUSTRALIAN SPECIES

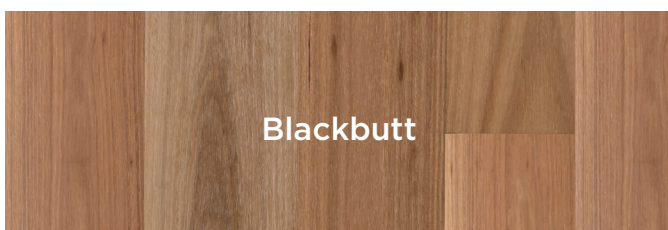

HARDWOOD + SMOOTH MATT

PRODUCT SPECIFICATIONS


Type	Australian Timber	Style	Single Plank
Description	Engineered multi-layer natural timber veneer interlocking floor boards featuring G5 Locking System		
Board Construction	3mm hardwood face layer 10mm Poplar base	Profile	Square Edge
Installation Method	Direct Stick or Floating	Finish	Smooth Matt, 8-10% Gloss
Coating	Factory coated with seven layers of UV cured acrylic	Underlay	Standard - 2mm Closed Cell Foam Acoustic - 3mm or 5mm ImpactaMat
Dimensions	1820/2100 x 136 x 14mm		1820/2100 x 180 x 14mm
Boards per Pack	8		6
m² per Pack	1.980m ² /2.284m ²		1.966m ² /2.268m ²
m² per Pallet	126.720m ² /146.176m ²		129.756m ² /149.688m ²
Pack Weight	23kg		23kg

TEST DATA

Fire Rating	Critical Heat Flux: 4.2kW/m ² Smoke Value: 8% minute	Slip Resistance	R10
Janka Rating	6 - 11	Certification	Forestry Stewardship Certification (FSC)

Warranty	25 Year Residential Warranty 10 Year Commercial Warranty		
Variations in Timber	<p>Timber is a natural material and variations in colour, texture and other naturally occurring features occur between pieces and batches of the same species.</p> <p>Timber flooring, whilst dried during production, continues to take up and give up moisture during its life, depending on weather, aspect and local conditions. In so doing, some movement and changes to the surface of your floor are to be expected and will be apparent. This is normal and may include fine cracks on and between boards and changes in colour.</p>		

AUSTRALIAN SPECIES

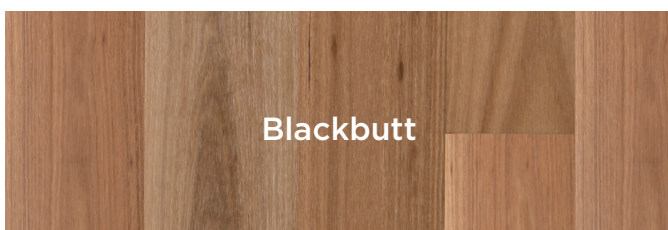

HARDWOOD + SMOOTH GLOSS

PRODUCT SPECIFICATIONS

Type	Australian Timber	Style	Single Plank
Description	Engineered multi-layer natural timber veneer interlocking floor boards featuring G5 Locking System		
Board Construction	3mm hardwood face layer 10mm Poplar base	Profile	Square Edge
Installation Method	Direct Stick or Floating	Finish	Smooth Gloss, 55-65% Gloss
Coating	Factory coated with seven layers of UV cured acrylic	Underlay	Standard - 2mm Closed Cell Foam Acoustic - 3mm or 5mm ImpactaMat
Dimensions	1820/2100 x 136 x 14mm		1820/2100 x 180 x 14mm
Boards per Pack	8		6
m² per Pack	1.980m ² /2.284m ²		1.966m ² /2.268m ²
m² per Pallet	126.720m ² /146.176m ²		129.756m ² /149.688m ²
Pack Weight	23kg		23kg

TEST DATA

Fire Rating	Critical Heat Flux: 4.2kW/m ² Smoke Value: 8% minute	Slip Resistance	R10
Janka Rating	6 - 11	Certification	Forestry Stewardship Certification (FSC)

Warranty	25 Year Residential Warranty 10 Year Commercial Warranty
Variations in Timber	<p>Timber is a natural material and variations in colour, texture and other naturally occurring features occur between pieces and batches of the same species.</p> <p>Timber flooring, whilst dried during production, continues to take up and give up moisture during its life, depending on weather, aspect and local conditions. In so doing, some movement and changes to the surface of your floor are to be expected and will be apparent. This is normal and may include fine cracks on and between boards and changes in colour.</p>

AUSTRALIAN SPECIES

